







## Introduction

OrcaTorch was founded by a group of passionate flashlight enthusiasts and technology geeks in 2014. The founder Carson Weng, is an outdoor enthusiast who has more than 10 years experience in the manufacture of high-end flashlights. When he was diving in Tailand for the first time in 2013, he found that divers were using low quality dive lights which lacked innovation and usually did not work in the critical moments. He decided to use his talent in the flashlight industry and created a high quality and innovative dive light brand and named it as OrcaTorch.

Orca, is a kind of whale that is fearless in challenging everything, free and unconstrained to parade all over the sea as it pleases. They conquer all the difficulties with team spirit and wisdom. They are the overlords of the sea and the best symbol of underwater adventure spirit.

Named after and inheriting the excellent characteristics of the Orca, which combine with advanced technology, OrcaTorch has developed a series of dive lights and underwater video lights that features high brightness, long runtime, long beam distance, significant waterproofness, high impact resistance, convenient operation, etc. OrcaTorch advocates the spirit of "follow your heart and just do it", we would love to explore the wonders of the world, feel the excitement of challenge and enjoy the freedom of life together with all underwater adventurers.








# ORC TORCH


# **Product Advantages**



CREE LED, Environmently friendly, long lifetime and durable 50000 hours lifespan, 10 times luminous efficinecy as the normal LEDs.



High efficiency constant current circuit instead of PMW circuit Constant brightness without flicker.



Two sides coated toughened glass with high water pressure resistance.

Water pressure resistant construction ,depth rated to 150 meters.



Alloy aluminum reflector with professional optical analysis.

## **Manufacturing process**

OrcaTorch lights use aircraft-grade aluminum AL-6061-T6 with light weight and high strength. All lights adopt premium Type III military hard-anodized finish which is better anti-abrasive than normal anodization and performs well in extreme environment. We also upgrade the finish of diving light to latest diamond grade seawater-corrosion-resistance hard anodized finish which is thicker and denser than normal Premium Type III military hard anodization, making the light surface as tough as diamond to protect the light from seawater corrosion.


## **Testing standard**

OrcaTorch's stated data has been measured according to the international flashlight test standards (ANSI/NEMA FL1) under laboratory conditions.

## Warranty

We will replace products afflicted with manufacturing defects within 30 days of purchase and repair a light free of charge within 12 months of purchase if problems develop under normal use.

If you register your OrcaTorch products through our official website www.orcatorch.com, you will get extra 12 months and totally 2 years warranty.

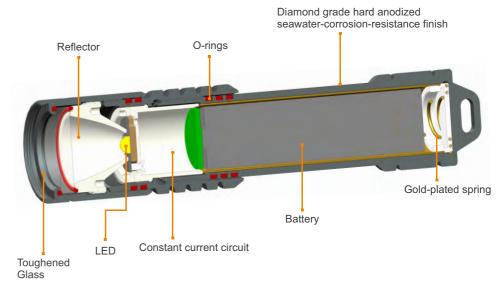



## Max 1500 lumens

- ◆ Focus Canister Dive Light
- 10° 60° Beam Angle Adjustable



## Max 1800 lumens

- ◆ Uses 1\*21700 5000mAh Li-ion rechargeable battery
- 6° super focus beam angle
- Mechanically head rotary switch offers high-reliability underwater



## Max 3000 lumens

- ◆ Uses 1\*21700 5000mAh Li-ion rechargeable battery
- 6° super focus beam angle
- Easy operation with side titanium alloy button switch











#### Main Features:

- ◆ 5\* CREE LEDs, max 4000 lumens
- 90°~180° angle adjustable cable
- Suitable for both back mount and side mount diving
- 7° super focus beam
- LED indicator offers an instant update of battery status
- 89Wh rechargeable large capacity battery
- 5 hours long runtime at brightest mode
- Battery can be used as a power bank
- Battery charging indicator displays the charging status



## **Large Capacity Battery Pack**














#### Color Teperature 6000K

1800K	4000K	ennuk	8000K	12000K	16000K





#### Main Features:

- ◆ Cree LED, 2700 lumens output
- Uses four 18650 Li-ion batteries
- 90° rotary lockable switch offers easy and reliable operation
- Easy-pack adjustable rotary goodman handle







super wide beam angle with no hot spot.









OrcaTorch D620V is specially designed for underwater photography, 120 degrees

D620

D620V

ANSI/NEMA FL1	High	Middle	Low
୬½ Output	2700 Lumens	800 Lumens	150 Lumens
( Runtime	2h30min	8h50min	37h
■ Beam Distance	260m (On land)		
Intensity	16870 cd		
Dimension	Light head: 83mm(Length) x 50mm(Diameter) Canister:113mm(Length)x54mm(Diameter)		
Net weight	681g(excluding battery)		
Accessories	Four 18650 batteries, charger, handle, Spare O-rings		

Color Teperature 6000K

1800K	4000K	6500K	8000K	12000K	16000K

www.orcatorch.com 08





## Max 4200 lumens





Three high power CREE LED Max 4200 lumens

## Main Features:

- 3\* CREE high power LED, max 4200 lumens
- Direct charging system with a short charging time of 3.5 hours
- Replaceable INR battery pack
- Titanium alloy tail button switch, easy operation
- Safe lock function avoids misoperation
- Specially designed handle, easy to carry and assemble
- Battery indicator


















DC:	chargi	ina	nort

ANSI/NEMA FL1	High	Middle	Low	
୬½ Output	4200 Lumens	1500 Lumens	500 Lumens	
(S) Runtime	1h	4h30min	14h	
■ Beam Distance	310m (On land)			
Intensity	24000 cd			
Charging time	3.5 hours			
Dimension	189mm(Length) x 51mm(Diameter) x 64mm(Head)			
Net weight	773g			
Weight in water	345g			
Accessories	Battery pa	Battery pack, home charger, lanyard, Spare O-rings		

#### Color Teperature 6000K

09

1800K	4000K	6500K	8000K	12000K	16000K

## Max 2500 lumens



#### Main Features:

- 5\*CREE high power LED, max 2500 lumens
- ◆ Uses 2\*26650 li-ion rechargeable batteries
- ◆ Super focus optical design provides 6 degrees beam angle
- ◆ Titanium alloy side button switch, anticorrosion and stable
- Safe lock function, prevents accidental operation
- Battery indicator















Goodman handle (Optional accessory)

ANSI/NEMA FL1	High	Middle	Low	
್ರೌಳ್ಯ Output	2500 Lumens	1050 Lumens	300 Lumens	
S Runtime	3h30min	5h	13h30min	
■ Beam Distance	464m (On land)			
Intensity	53900 cd			
Dimension	228mm(Length) x34mm(Diameter) x60mm(Head)			
Net weight	453g(excluding battery)			
Weight in water	355g(excluding battery)			
Accessories	2*26650 b	atteries, charger, lanyard, Spa	re O-rings	

#### Color Teperature 6000K

1800K	4000K	6500K	8000K	12000K	16000k

D800

## Max 2100 lumens



#### Main Features:

- 3\*Cree LED, 2100 lumens output
- ◆ Uses 2\*26650 batteries
- ◆ Mechanical tail rotary switch offers high reliability underwater
- Aircraft-grade high strength aluminum material
- Over-discharge protection function

















ANSI/NEMA FL1 Mode	
್ರ <sup>ು</sup> ್ದ Output	2100 Lumens
Nuntime	3h20min
Beam Distance 336m (On land)	
Intensity 28270cd	
Dimension 222mm(Length) x 34mm(Diameter) x 66mm(Head)	
Net weight 462g (excluding battery)	
Accessories 2*26650 batteries, charger, Spare O-ring, lanyard	

#### Color Teperature 6000K

1800K	4000K	6500K	8000K	12000K	16000K





**D530** 

## Max 1300 lumens



#### Main Features:

- ◆ CREE LED, max 1300 lumens
- ◆ Uses 1\*18650 Li-ion rechargeable battery
- 8° super focus beam angle
- Easy operation with side titanium alloy button switch
- · Battery indicator













Powered by One 18650 USB Battery

ANSI/NEMA FL1	High	Low	
್ರೌ Output	1300 Lumens	380 Lumens	
Nuntime	1h25min	4h30min	
■ Beam Distance	291(on land)		
Intensity	21164 cd		
Dimension	142mm(Length) x 25.5mm(Diameter) x 35.5mm(Head)		
Net weight	136g (Excluding Battery)		
Accessories	One USB Rechargeable 18650 Li-ion battery, Micro USB Cable, Lanyard, Spare O-rings		

#### Color Teperature 6000K

1800K	4000K	6500K	8000K	12000K	16000K

## D550

## Max 1000 lumens



#### Main Features:

- ◆ Cree LED, 1000 lumens output
- Uses one 18650 battery
- Magnetic controlled tail switch offers high waterproofness and easy operation underwater
- Standard included wrist strap fastens the flashlight to the back of your hand
















#### Color Teperature 5000K

1800K	4000K	6500K	8000K	12000K	16000K

www.orcatorch.com 14



Max 1000 lumens



color:

### Main Features:

- Cree LED, max 1000 lumens output
- Uses 1\*18650/2\*CR123A/2\*16340 battery
- Mechanical head rotary switch offers high reliability underwater





ANSI/NEMA FL1	Mode	
್ರೌ Output	1000 lumens	
Nuntime	2h	
■ Beam Distance	250m (On land)	
Intensity	14300cd	
Dimension	134.5mm(Length) x 24mm(Diameter) x 30mm(Head)	
Net weight	113.5g (excluding battery)	
Accessories	s 18650 battery, charger, Spare O-ring, lanyard	

#### Color Teperature 5000K

1800K	4000K	6500K	8000K	12000K	16000K

D570-GL

Max 1000 lumens



Multiple Applications



On Land



- ◆ Two light sources :8°white beam + green laser light
- Easy operation with side button switch
- Battery indicator
- ◆ Intelligent Over-Heat protection















Underwater Lighting

Attracting Sea Animals

ANSI/NEMA FL1	White	laser	
್ರೌಟ್ Output	1000 Lumens	-	
S Runtime	1h51min	13h36min(D570-GL) 80h(D570-RL)	
■ Beam Distance	281(on land)	>1000m(on land)	
Intensity	19800 cd	-	
Dimension	134mm(Length) x 26mm(Diameter) x 40mm(Head)		
Net weight	176g(excluding battery)		
Accessories	One 18650 Li-ion battery, ch	arger, lanyard, Spare O-rings	

ORCATORCH also provides option of Red Laser D570-RL.

#### Color Teperature 5000K

1800K	4000K	6500K	8000K	12000K	16000K





## Main Features:

- Green Laser with 520nM wavelength
- Uses a single AA battery or a 14500 Li-ion battery
- Mechanical head rotary switch offers highreliability underwater











**Laser Only** 

Battery Model		AA battery	14500 battery	
( Runtime	D560-GL	5h20min	5h	
Kuntime	D560-RL	10h24min	17h30min	
Beam Distance		>1000m(On land)		
Dimension		92mm(Length) x 20mm(Diameter) x 24mm(Head)		
Net weight		50g (excluding battery)		
Accessories		2*AA batteries, Lanyard, Spare O-ring,		

ORCATORCH also provides option of Red Laser D560-RL.





## Max 630 lumens



color:





#### Main Features:

- Mini dive light with only 9 cm long, 47.5g
- Cree LED, 630 lumens output
- ◆ Uses a single AA battery or a 14500 Li-ion battery
- ◆ Mechanical head rotary switch offers high reliability underwater













Mx05 Mask mount (Optional accessory)

ANSI/NEMA FL1	AA battery	14500 battery	
್ರೌ Output	180 Lumens	630 Lumens	
S Runtime	1h25min	1h	
■ Beam Distance	73m (On land)	119m (On land)	
Intensity	1320cd	3520cd	
Dimension	92mm(Length) x 20mm(Diameter) x 24mm(Head)		
Net weight	47.5g (excluding battery)		
Accessories	Spare Spa	re O-ring, lanyard	

Color Teperature 5000K

1800K	4000K	6500K	8000K	12000K	16000K





**UW Photo/Video Dive Lights** 

## Max 1200 lumens



Snoot (Optional accessory)

ZJ18 (Optional accessory)



#### Main Features:

- CREE LED, max 1200 lumens
- ◆ Uses 1\*18650 Li-ion rechargeable battery
- 140° super wide beam angle
- Easy operation with side titanium alloy button switch
- Battery indicator











ANSI/NEMA FL1	High	Low	
ې <sup>بړ</sup> Output	1200 Lumens	290 Lumens	
Nuntime	1h24min	4h36min	
Dimension	142mm(Length) x 25.5mm(Diameter) x 35.5mm(Head)		
Net weight	145g(excluding battery)		
Accessories	One USB rechargeable 18650 Li-ion battery, lanyard, Spare O-rings		

#### Color Teperature 6000K

1800K	4000K	6500K	8000K	12000K	16000K



## Max 10500 lumens



## Main Features:

- ◆ CREE COB LED, Max 10500 lumen output
- Spherical toughened glass optical lens design, 120° wide angle beam
- Color temperature 5700K, CRI Ra92
- Built-in replaceable large capacity battery
- ◆ Tail switch controls 4 brightness modes
- ◆ Tail LED indicator instantly displays the battery's remaining charge

















Max 10500 lumen output

ANSI/NEMA FL1	Turbo	High	Middle	Low	
್ರೌಳ Output	10500 Lumens	6200 Lumens	3000 Lumens	1100 Lumens	
S Runtime	1h12min	1h54min	3h50min	10h	
Charging time	3h10min				
Dimension	255mm(Length) x 53mm(Diameter) x 72mm(Head)				
Net weight	1059g (excluding battery)				
Weight in water	495g (Including battery)				
Accessories	Battery pack, home charger, ball joint, OrcaTorch rubber ring, Spare O-rings				

#### Color Teperature 5700K

1800K	4000K	6500K	8000K	12000K	16000K

Max 5000 lumens





COB LED 5700K CRI: Ra92

#### Main Features:

- ◆ CREE COB LED, Max 5000 lumens
- ◆ 120° wide angle beam
- ◆ Color temperature 5700K, CRI Ra92
- Magnetic fast charging system with a short charging time of 2.5h
- Standard included battery pack
- ◆ Titanium alloy switch controls 3 lighting modes













Magnetic fast-charging system

ANSI/NEMA FL1	High	Middle	Low					
پہٰدِ Output	5000 Lumens	2000 Lumens	500 Lumens					
C Runtime	50min	2h10min	8h50min					
Charging time		2.5 hours						
Dimension	129. 5mm(l	129. 5mm(Length) x 45mm(Diameter) x 53mm(Head)						
Net weight		430g						
Weight in water		215g						
Accessories	home charger,	ball joint, OrcaTorch rubber ring	, Spare O-rings					

#### Color Teperature 5700K

1800K	4000K	6500K	8000K	12000K	16000k


www.orcatorch.com 22



# **D900V**

## Max 2200 lumens





#### Main Features:

- Max 2200 Lumens
- Red, UV, Neutral white with 120° flood beam
- ◆ Cool white with 8° spot beam
- Magnetic fast charging system with a short charging time of 2.5h
- Standard included a battery pack
- Dual titanium alloy switch controls different lighting sources independently

















ANSI/NEMA FL1	Neutral White	(flood beam)	Cool White	(spot beam)	Red	UV					
ANSI/NEWA FLI	High	Low	Low	Rea	UV						
ېنږ Output	2200 Lumens	600 Lumens	820 Lumens	250 Lumens	250 Lumens	-					
( Runtime	2h45min	4h20min	4h	18h	7h	5h					
■ Beam Distance		230m (On land)									
Intensity		13640 cd									
Charging time		2.5 hours									
Dimension		129.5mm(Length) x 45mm(Diameter) x53mm(Head)									
Net weight		430g									
Weight in water			21	5g							
Accessories		nome charger, b	all joint, OrcaT	orch rubber ring	g, Spare O-rings	;					

#### Color Teperature 5000K

1800K	4000K	6500K	8000K	12000K	16000K

## Max 1600 lumens



#### Main Features:

- Max 1600 lumens
- Three lighting sources: neutral white, red and UV
- 120 degrees super wide floodlighting
- ◆ Titanium alloy side button switch, easy operation











ANSI/NEMA FL1	High	Low	Red	UV						
ુર્ખ્ય Output	1600 Lumens	550 Lumens	250 Lumens	-						
C Runtime	2h	4h	3h25min	6h40min						
Dimension	15	153mm(Length) x 30mm(Diameter) x 45mm(Head)								
Net weight		250g (excluding battery)								
Accessories	1*recha	rgeable battery, USB ca	able, ball joint, lanyard,	Spare O-rings						

#### Color Teperature 5000K

1800K	4000K	6500K	8000K	12000K	16000K

www.orcatorch.com 24



# Specifications







SH01,SH02,SH03 Snap Hook

Torpedo

18500 USB Battery 3400 mAh



M03 Ball Joint



H620 Goodman Handle



ZJ13 Ball Joint Clamp



Tray with Handles



**HM01 Helmet Mount** 



ZJ18 Ball Joint Bracket



P11 Scuba Diving Pointer



Waterproof Dry Bag (5L)

	D950V	D910V	D900V	D860	D850	D820V	D800	D630	D620	D611	D570-RL	D570-GL	D560-RL	D560-GL	D560	D550	D530V	D530	D520	Model
	10500 Lumens	5000 Lumens	2200 Lumens	4200 Lumens	2500 Lumens	1600 Lumens	2100 Lumens	4000 Lumens	2700 Lumens	2400 Lumens	1000 Lumens	1000 Lumens		1	630 Lumens	1000 Lumens	1200 Lumens	1300 Lumens	1000 Lumens	Max Output
	10h	8h50min	18h	14h	13h30min	6h40min	3h20min	23h50min	37h	22h	80h	11h36min	17h30min	5h	1h25min	5h45min	4h36min	4h30min	2h	Max Kuntime
	4	ω	6	ω	ω	4	_	з	ω	ω	2	2	_	_	_	ω	2	2	_	Nodes
	150m	150m	150m	150m	150m	150m	150m	150m	150m	150m	150m	150m	150m	150m	150m	150m	150m	150m	150m	waterproof
	255x53x72(mm)	129.5X45X53(mm)	129.5X45X53(mm)	189X51X64(mm)	228X34X60(mm)	153X30X45(mm)	222X34X66(mm)	Light Head: 96mm x 60mm Canister: 209mm x 59mm	light head: 83X50(mm) canister: 113X54(mm)	light head: 82X50(mm) canister: 194X40(mm)	134X26X40(mm)	134X26X40(mm)	92mX20X24(mm)	92mX20X24(mm)	92X20X24(mm)	146mX25.4X40(mm)	142x 25.5x 35.5(mm)	142x 25.5x 35.5(mm)	134.5X24X30(mm)	Dimension
	1059g	430g	430g	773g	453g	250g	462g	1370g	681g	580g	176g	176g	50g	50g	47.5g	183g	145g	136g	113.5g	Net Weight
	Battery pack	Battery pack	Battery pack	Battery pack	2*26650	1*rechargeable battery	2*26650	Battery pack	4*18650	2*26650	1*18650	1*18650	1*AA/1*14500	1*AA/1*14500	1*AA/1*14500	1*18650	1*18650	1*18650	1*18650/2*CR123A/2*16340	Вапегу
	D950V	D910V	D900V	D860	D850	D820V	D800	D630	D620	D611	D570-RL	D570-GL	D560-RL	D560-GL	D560	D550	D530V	D530	D520	Model